For Residential and Commercial Applications			
Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

PLB207X 1/4 Turn Straight Stop - Cold Expansion Barb x Compression


Use: For use only in potable water distribution systems, hot and cold, in accessible locations only

Part Listing:

PLB207X B 1/2" nom cold expansion barb (for PEX) x 3/8" OD compression, chrome plated, bulk




	PART DIMENSIONS (Inches)					
Model	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E	
PLB207X	1.77	1.13	1.51	2.31	.94	



Operating Specifications		
Temperature	Pressure	
40°- 140° F	125 PSI maximum	

MATERIAL SPECIFICATIONS			
Body	Low lead brass, chrome plated		
Stem	Low lead brass		
Ball	Low lead brass, chrome plated		
Seats	PTFE		
O-ring	NBR		
Handle	ABS, chrome plated		
Handle Screw	Stainless steel		
Compression Nut	Brass, chrome plated		
Compression Sleeve	Brass		
Adaptor	Low lead brass, chrome plated		
•			

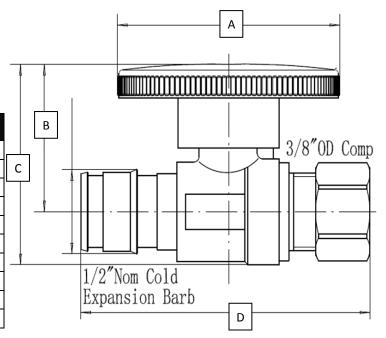

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (File #8425)
- IAPMO listed to NSF / ANSI 372 for No-Lead (File #8427)
- IAPMO listed to NSF61 (File #N-8426)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

